


RCCN 日成BGX型金属锁紧型软管防水接头 Metal waterproof cable gland

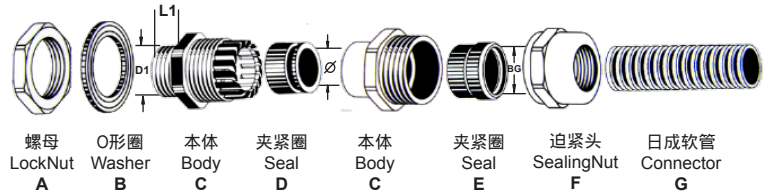

螺牙规格:公制螺牙(Metric).

产品材质:A.C.F部位均采用锌合金镀镍制成.D采用耐油丁腈橡胶(NBR)制成, B.E采用硅橡胶制成.

产品认证:欧洲CE,欧洲环保ROHS.

防护等级:在规定的卡口范围内,并使用O形密封圈旋紧迫紧头,达到IP68.

产品特性:配套锁紧式电缆接头,防电线松动,内锁扣和本体特殊设计,装卸只需拨插无需工具,大大缩短了安装时间,夹紧电缆范围大,抗拉力特强,可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂.

说明:本系列应环境要求新开发设计,代替原日成老款BGL系列.

本品适合对环境要求较高使用:室外水下灯具,地铁机车,风能太阳能,核电,轮船,电机,高端设备等项目安装.配合日成尼龙管使用,户外用时配合日成SCM含胶管保护更理想.

Thread:Metric

Material:A.C.F are made of zinc metal plated with nickel.D made of NBR,B,E are made of rubber

Certificates:CE,ROHS.

Protect rate:in bayonet scope,usd with O ring,screw down lock nut,can be up to IP68

Product characteristics:Special design of part D and E,used with part F, can save your time,large spread of cable sealing,good re-tensile,waterproof,ashproof,re-salty, withstand impregnant like acid,alkali,alcohol,oil,grease

单位/Unit:mm

型号 Item No.	螺牙规格 Thread	适用电缆 Cable Range Ø	对应日成软管型号 Suit to RCCN conduit item no BG	对应日成软管型号 Suit to RCCN conduit item no BG	螺纹外径 Thread O.D. D1	机板口径 Panel Mounting Hole	螺纹长度 Thread Length L1	包装 Std.Pkg. pcs
公制螺牙/Metric thread BGX-M								
BGX-M12(BG07)	M12×1.5	3-6	BG-07	10.0	12	12-12.3	6	100PCS
BGX-M12(BG10)	M12×1.5	3-6	BG-10	13.0	12	12-12.3	6	
BGX-M16(BG07)	M16×1.5	4-8	BG-07	10.0	16	16-16.3	7	
BGX-M16(BG10)	M16×1.5	4-8	BG-10	13.0	16	16-16.3	7	
BGX-M16(BG12)	M16×1.5	4-8	BG-12	15.8	16	16-16.3	7	
BGX-M18(BG12)	M18×1.5	6-10	BG-12	15.8	18	18-18.3	8	
BGX-M18(BG15)	M18×1.5	6-10	BG-15	18.5	18	18-18.3	8	50PCS
BGX-M20(BG12)	M20×1.5	8-12	BG-12	15.8	20	20-20.3	8	
BGX-M20(BG15)	M20×1.5	8-12	BG-15	18.5	20	20-20.3	8	
BGX-M20(BG17)	M20×1.5	8-12	BG-17	21.2	20	20-20.3	8	
BGX-M22(BG17)	M22×1.5	10-14	BG-17	21.2	22	22-22.3	9	
BGX-M24(BG17)	M24×1.5	10-14	BG-17	21.2	24	24-24.3	10	
BGX-M25(BG17)	M25×1.5	10-14	BG-17	21.2	25	25-25.4	10	10PCS
BGX-M25(BG20)	M25×1.5	10-14	BG-20	25.0	25	25-25.4	10	
BGX-M25(BG23)	M25×1.5	10-14	BG-23	28.5	25	25-25.4	10	
BGX-M27(BG23)	M27×1.5	13-18	BG-23	28.5	27	27-27.4	11	
BGX-M30(BG23)	M30×1.5	13-18	BG-23	28.5	30	30-30.4	11	
BGX-M30(BG29)	M30×1.5	13-18	BG-29	34.5	30	30-30.4	11	
BGX-M32(BG23)	M32×1.5	15-22	BG-23	28.5	32	32-32.4	11	10PCS
BGX-M32(BG29)	M32×1.5	15-22	BG-29	34.5	32	32-32.4	11	
BGX-M33(BG23)	M33×1.5	15-22	BG-23	28.5	33	33-33.4	11	
BGX-M33(BG29)	M33×1.5	15-22	BG-29	34.5	33	33-33.4	11	
BGX-M36(BG29)	M36×1.5	18-25	BG-29	34.5	36	36-36.4	11	
BGX-M40(BG29)	M40×1.5	18-25	BG-29	34.5	40	40-40.4	12	
BGX-M40(BG36)	M40×1.5	18-25	BG-36	42.5	40	40-40.4	12	10PCS
BGX-M50(BG36)	M50×1.5	26-32	BG-36	42.5	50	50-50.4	13	
BGX-M50(BG48)	M50×1.5	26-32	BG-48	54.5	50	50-50.4	13	
BGX-M63(BG48)	M63×1.5	37-44	BG-48	54.5	63	63-63.4	14	

可定制铜制 型号例:BGX1-M20(BG-17)

Copper material can be produced, such as:BGX1-M20(BG-17)